


# FRS-HD-SDI / FRS-HD-DMUX

## HD-SDI 高清帧同步器

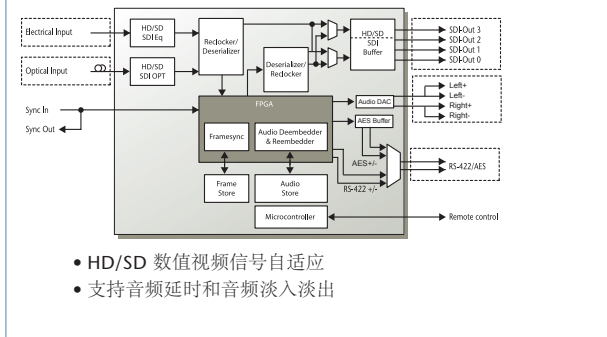

### 特性

功耗	5V/3.7W, +15V/0.9W, -15V/0W
GPI	3输出

### 支持的标准

SD-SD	SMPTE 259M, SMPTE 272M-AC
HD-SDI	SMPTE 292M, SMPTE 274M, SMPTE 291M, SMPTE 296M, SMPTE 299M
视频切换时间点	SMPTE RP168 SMPTE 170M, ITU-R. BT.470 definition and sync
AES	AES3
Optical	SMPTE 297M, SMPTE 292M
EDH	SMPTE RP165
视频有效载荷识别	SMPTE 352M

### 电信号输入

接口数量	1
信号格式	SD-SDI, HD-SDI
帧率	24p, 50i, 60i, 50p or 60p and pull down rates
连接器	BNC

### 光信号输入

输入数量	1
信号格式	SD-SDI, HD-SDI
波长	1200 – 1620nm
最大光输入功率	-3dBm
光接收灵敏度	-22/-28dBm
HD-SDI/ SD-SDI	
连接器	SC/UPC, 单模

### 电信号输出

接口数量	4
信号格式	SD-SDI, HD-SDI
连接器	BNC, 75 Ohm

### 数字音频与数据接口

信号接口数量	1 (data or AES)
音频信号码率	48kHz
连接器	RJ45

### 模拟音频输出

接口数量	1
信号类型	Analog stereo audio
连接器	WECO

### 订货信息

18547 FRS-HD-SDI-RM	SD-SDI/HD-SDI Frame sync with MM optical i/p. Without audio output and with standard multimode optical receiver.
16866 FRS-HD-SDI	SD-SDI/HD-SDI Frame sync. Without audio output and without optical receiver.
16867 FRS-HD-DMUX	SD-SDI/HD-SDI Frame sync with audio o/p. With audio output and without optical receiver.
16868 FRS-HD-SDI-R	SD-SDI/HD-SDI Frame sync with optical i/p. Without audio output and with standard optical receiver.
16869 FRS-HD-DMUX-R	SD-SDI/HD-SDI Frame sync with audio o/p and optical i/p. With audio output and with standard optical receiver.